




IP55 BOX CLOSURE

IP55 Box Closure is a covered box-style closure that is pre-terminated with a multi-fibre Miniflex™ Fibre Cable Tail, ready to be routed through microduct back to the Node.

The Spliceless Box provides 4,8,12 or 16 pre-terminated SC/LC APC or SC/LC UPC or LC sockets, and ports for an identical number of microduct routes to the home which can be connected as required for rapid, simple fibre deployment.

ADVANTAGES

- IP55 Covered Closure for water and dust protection
- Industry standard SC and LC connections
- 2 inbound cable ports to accept loop-in cables if required
- IP55 blanking plugs for unused microduct routes
- Suitable for use with preinstalled optical splitters and WDM devices
- Available with preinstalled optical splitters if required

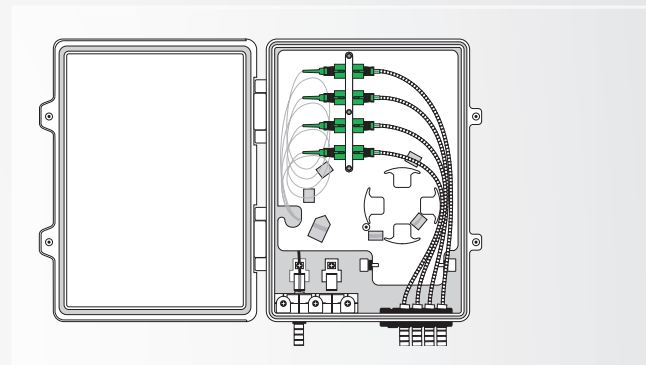

COMPATIBILITY LIST

IP55 Box Closure is compatible with:

- Industry standard SC and LC terminated cables
- Standard sized microduct
- Loop-in Cables

SPECIFICATIONS

- ISO9001 Production
- UV Stable

APPLICATIONS

- ✓ FTTH/FTTx - OUTDOOR
- ✓ FTTH/FTTx - INDOOR

DATA INFRASTRUCTURE

TELECOMS

TRANSPORT - AUTOMOTIVE

TRANSPORT - AEROSPACE

CONTACT US

EMEA Sales:	+44 (0) 1728 726 600	EMEA Sales:	sales@m2fx.com
USA Sales:	+1 847 325 5454	USA Sales:	sales@m2fx.com
EMEA Tech Support:	+44 (0) 1728 727 922	EMEA Support:	techsupport@m2fx.com
USA Tech Support:	+1 847 325 5454	USA Tech Support:	support@m2fx.com